

Product Description

CR-DIG5203E3 is a complete-functional interpretation unit, for providing with simultaneous, direct and indirect interpretations covering 15+1 languages.

Functions and Features


- Full-digital audio technology, with built-in DSP procession.
- · 20-20K perfect quality audio.
- Blue background 320X64 LCD monitor.
- · Heart-shaped directional capacitive pickup, with dualcolor indicator, red when speech is on.
- · 2m connection cable attached.
- · Adopt knob MIC stand.
- With inner magnetic speaker, headset port and volume adjustment knob.
- · With indirect and direct interpretation function.
- Intercom calling.
- · SMS.
- Tea application.

- · With cough elimination.
- · To be set as operator.
- · With two groups of headsets and earphone ports.
- Individual adjustable speaker and earphone volume.
- Support headset and standing MIC pickup.
- Volume indicator.
- Input channel shortcut.
- · Output channel shortcut.
- Speech timer.
- · Nearly unlimited number of interpretation units

Specification Parameters

Parameter	CR- DIG5203E3
Power	Controller power supply or DC 24V input
Frequency response	20-20KHZ
SNR	>80dB
Channel crosstalk	>80dB
THD	<0.05%
Power consumption	1.8W
MIC parameter MIC type	Capacitive heart-shaped single directional
Sensitivity	-46dBV/pa
Frequency response	20-20KHZ
Input impedance	2.2K
Speaker power	2W
Headset output Headset load	>8 Ω
Headset volume	10mW
Monitor Control display	320*64(blue background/white font)
Unit port	8-core aviation port
Color	Deep grey

Diagram

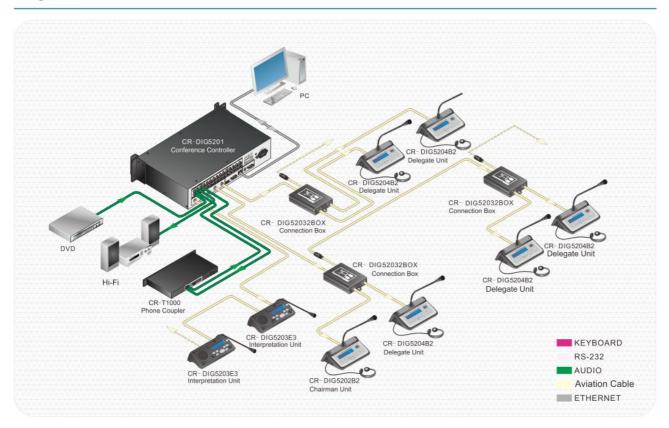

Drawing

